


Ring frame 'Berlin'

1384034

This state-of-the-art Top Competition ring frame has a revolutionary shock absorption system. This system reduces the peak forces on the shoulders considerably. It is designed to prevent undesired counter movements, thus supporting the gymnast and allowing more repeats with less energy. The ring frame is safely secured by a dual tension system with slide locks and by strong high-quality steel cables. It is a unique concept, specially designed for competition and training.

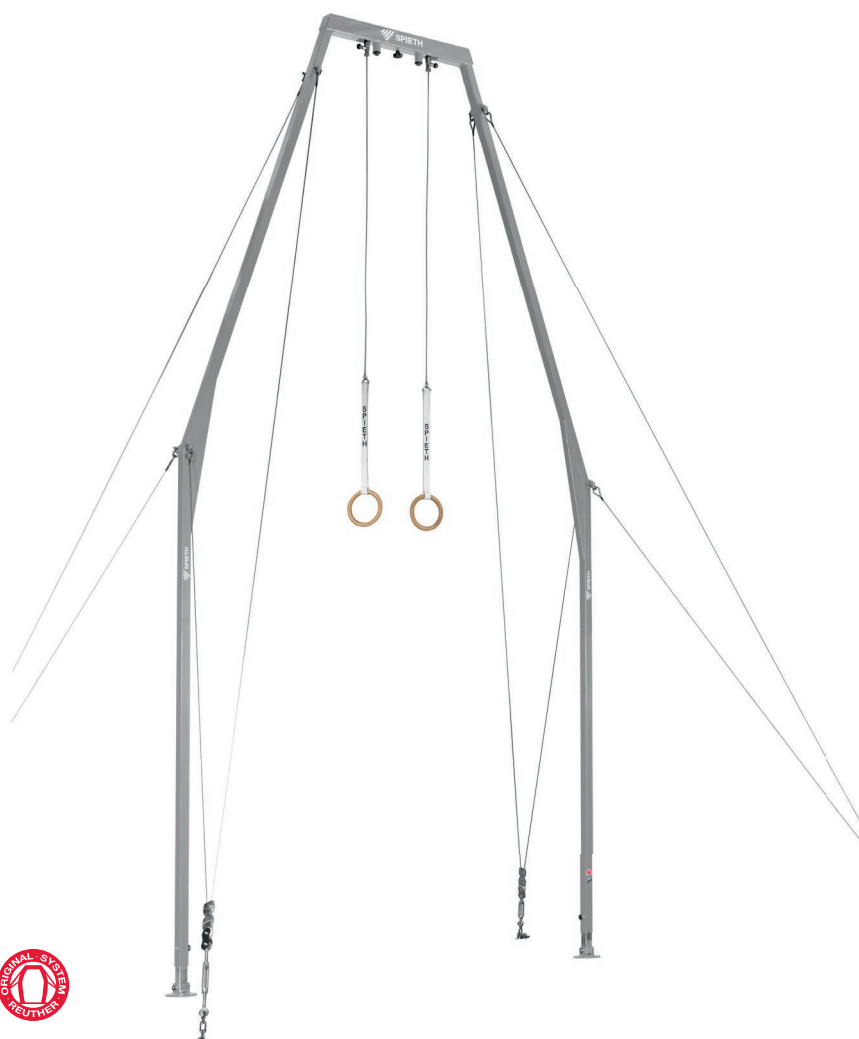

Technical data:

Reference number:	1384034
Height of frame:	5,98 metres. Required height of hall: 6,10 metres minimum
Rings:	multilayer wooden rings, mounted on non-twisting pre-stressed, plastic covered, stainless steel cables with reinforced leather covered straps suspended on high-quality ball bearings and a shock absorption system adjustable from 275 to 310 cm with 5 cm increments and fine-adjustment to level the position of the rings
Height of rings:	
Frame:	heavy-duty epoxy-coated wide gage steel tubes; inner tubes chrome-plated. Wide round feet with nonmarking floor protection
Tension system:	dual cable tension system with 4 slide locks, 4 tension swivels, 4 chains and 16 D-shackles
Anchoring:	4 floor anchors (not included)
Space occupation:	400x550 cm (excluding landing mats)
Pretension:	Adjustable depending on body weight and gymnasts ability

Original System Reuther



Pretension adjuster



Adjustable shock absorption system



Independent height adjustment





FIG certified competition model

Ring frame 'Berlin'

1384034

Space saving solutions...

In halls where the space is insufficient and over landing pits, the SPIETH Gymnastics ceiling ring system is a perfect option. The rings are suspended on exactly the same shock absorption system as the full ring frame, offering the same advantages while saving a lot of space at the same time. The absence of a frame makes the rings easier accessible. Auxiliary constructions are not included.

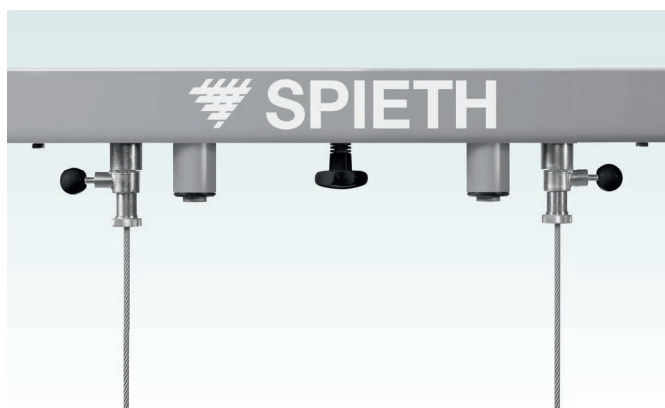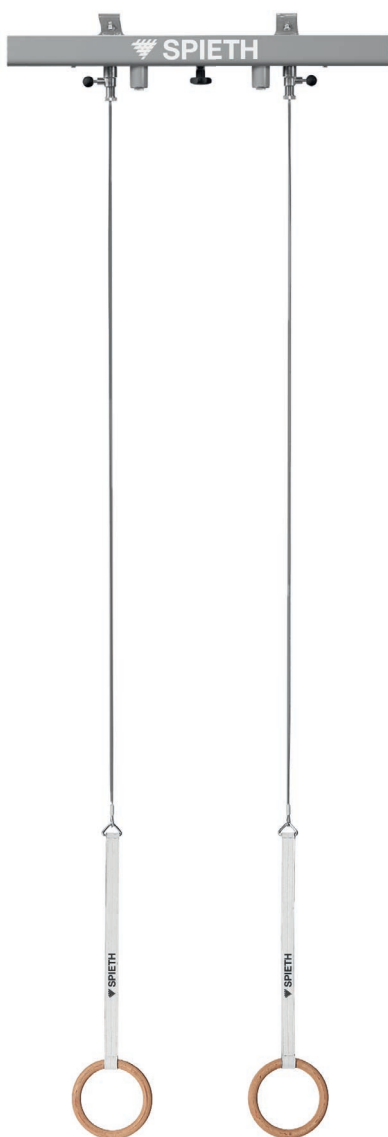


Ceiling rings with shock absorption

FIG Apparatus Norms:

- Height of rings: 280 cm
- Length of cables: 300 cm
- Distance between cables: 50 cm

Related equipment:

- Ring hook: 1760308
- Ceiling ringset: 1289000
- Floor anchor: 1384121 or 2511221
- Trainer Console: 1490372

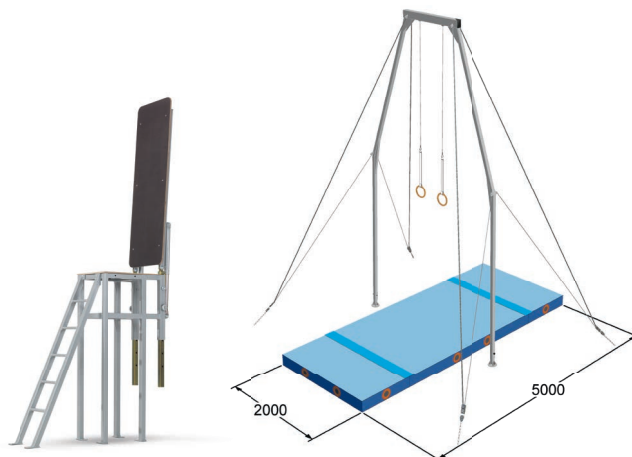

Trainer console: 1490372

Set landing mats: 1565832